

Comfort Plus

Dynamic Replacement System



Prevention & Comfort

Pressure relief no longer has to be uncomfortable



- Alternating Replacement Mattress used in the prevention and treatment of pressure ulcers
- 16 x Individual Alternating Cells which can be individually replaced in the event of damage
- Unique Visco top section dramatically enhances patient comfort
- Suitable for low Body Mass Index
- CMHR Foam base offers protection should there be a power fail
- Emergency CPR facility tag allows rapid deflation of mattress
- Lightweight and compact pump
- Quiet, Vibration free
- Low pressure indicator
- Transport / Static Facility
- Heavy duty nylon base sheet with a vapour permeable multi stretch cover
- Ideal for all environments where comfort is a concern
- Effective, comfortable alternative to a standard alternating system



Dynamic Replacement System




Light compact power unit




Simple transport facility



Highly visible rapid C.P.R. deflation

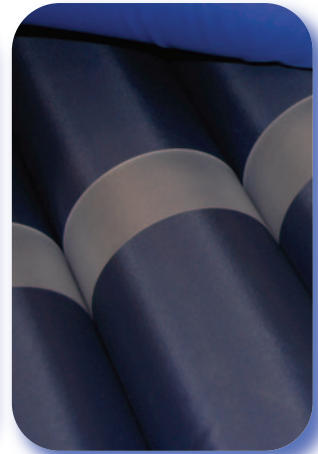

Individual cells for easy maintenance

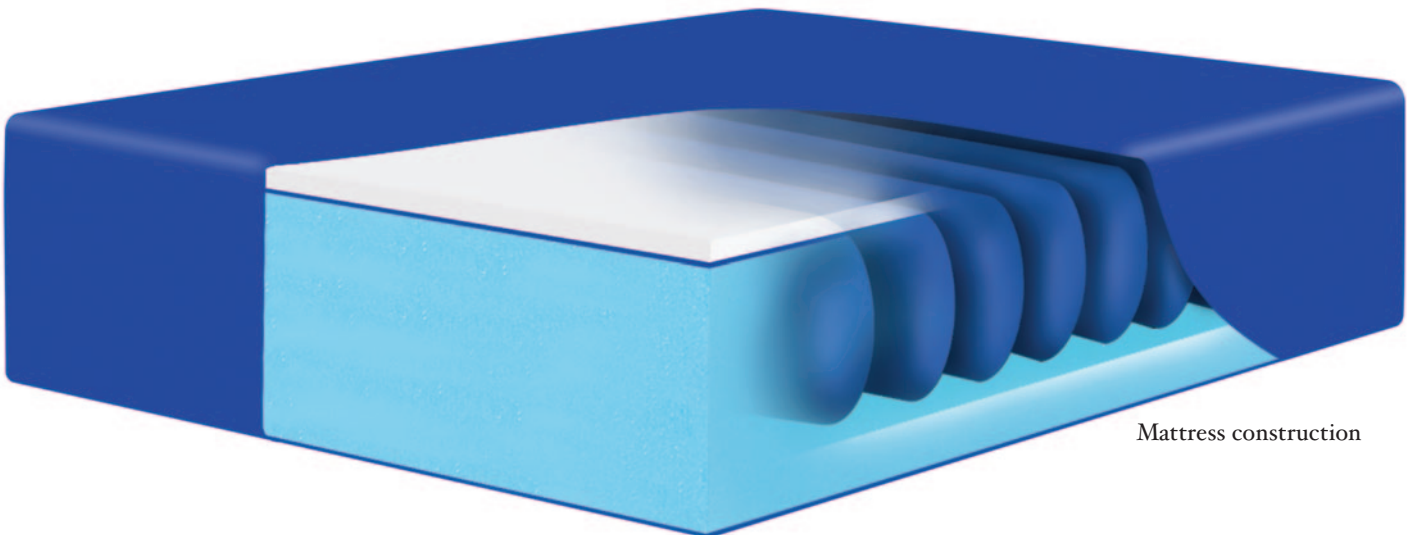

Mattress construction

Technical Specifications

Minimum weight limit	20 kgs
Maximum weight limit	114 kgs
Warranty	1 year
Operating cycle	12 minutes
Mattress dimensions	1980 x 900 x 190mm
Pump dimensions	260 x 140 x 100mm
Safety standards	IEC 601-1, BS5724 Part 1
Noise level	Less than 30db
Rating	AC 230V 50Hz 1A 12W

Angel Healthcare Solutions Ltd reserves the right to amend specifications without notice.